



# **SCHLEPP**<sup>+</sup>**FIX**

*simply better*

## **SLURRY SPREADER TANK ATTACHMENT**

The innovative, emission-reducing  
slurry application system  
for future-oriented agriculture

Swiss patent CH716757 | European patent EP3959956

*no run-off hoses*

*no rotating distributor head*

*low wear*

*significant fuel savings*


*working widths 2.5 m - 15 m*

 **SWISSTEC AG**  
SPEZIALMASCHINENBAU

# Schleppfix SFA for tank attachment

## Characteristics

- ✓ **High spread rate** also possible with vacuum tankers
- ✓ No **V distribution** pattern on start-up
- ✓ Easy folding process
- ✓ With **damped hydraulic cylinders** for quick and smooth folding
- ✓ **Easy to attach** with the possibility of mounting on any tanker
- ✓ **Good shifting of centre of gravity** towards the front when driving on the road means low drawbar relief
- ✓ Reduced ground pressure due to the applicator being supported during spreading

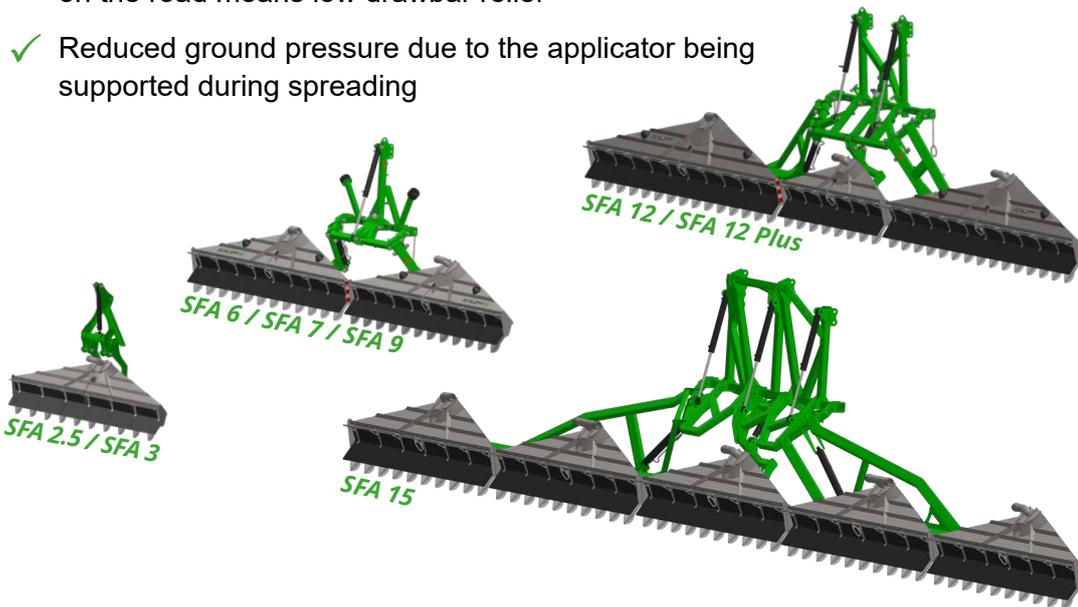

## SAVE MONEY WHEN SPREADING SLURRY SIMPLE | EFFICIENT | INEXPENSIVE

- 100% LESS FUEL CONSUMPTION
- 68% LESS MAINTENANCE COSTS
- 72% LESS SPREADING TIME
- 63% LESS CLEANING TIME

**76% INCREASE IN EFFICIENCY  
THANKS TO SCHLEPPFIX**



## Technical details Schleppfix SFA



**Hydraulic system**  
Simple hydraulics with mechanical sequence valves – low demands on the tractor hydraulics

**Simple attachment system**  
Mounting carried out using coupling triangle with support via top link

**Distribution plate**

Patented distribution plate made from wearproof plastic, variably adjustable cross-section due to range of inlet nozzles, high spread rate also with vacuum compressor. Service cover with quick-release locks for cleaning purposes and removal of foreign bodies.

**Oscillation compensation**  
Hilly terrain can be mastered by means of spring-centred compensation

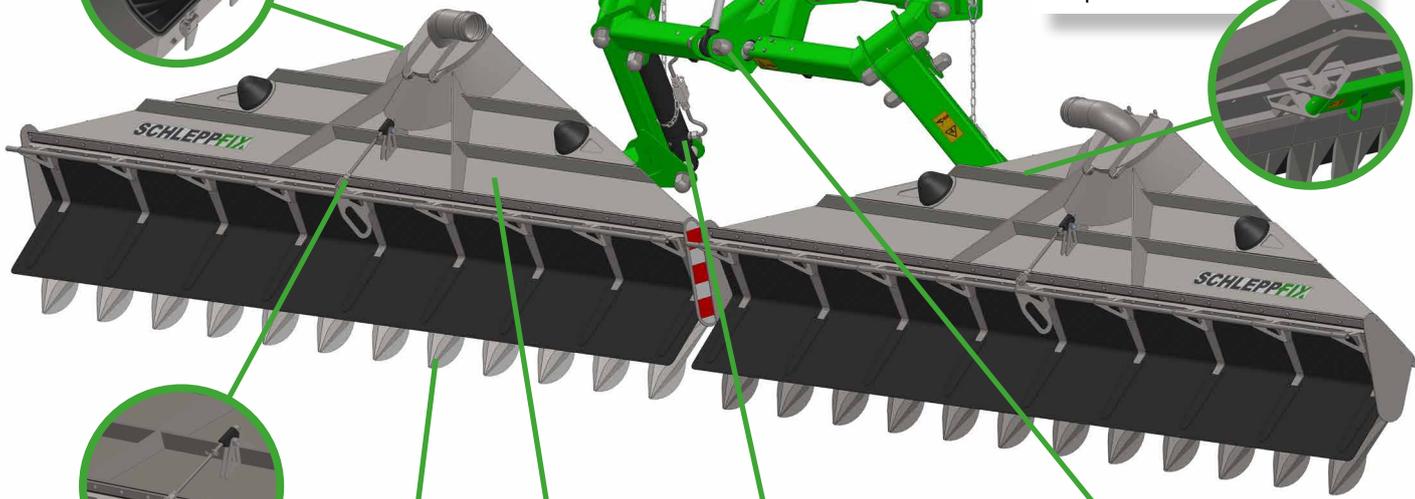

**Deflector**

Can simply be folded up for cleaning without using tools

**Distribution boxes**

Made entirely of stainless material (chromium steel), long service life and low maintenance costs

**Lateral compensation**

Significantly uneven ground can be compensated for by means of a special linkage joint




**Triangular share option**

Version available consisting of HARDOX with 30 cm or **DUOFIX**-double shoe with 15 cm spacing in wear-resistant plastic

**Folding cylinder**

End position-damped hydraulic cylinders which guarantee a smooth folding process

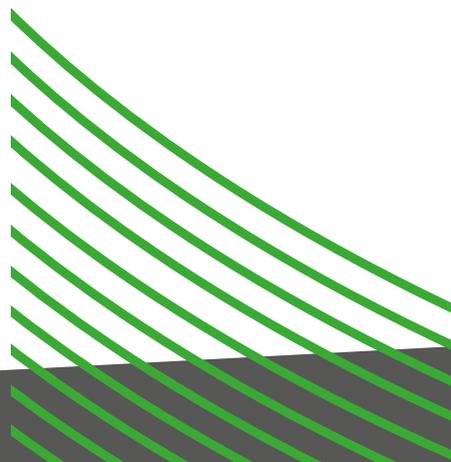

## Technical Data

Schleppfix Type	SFA 2.5	SFA 3	SFA 6	SFA 7	SFA 9	SFA 12	SFA 12 Plus	SFA 15
Working width in meters	2.5	3.0	6.0	7.2	9.0	11.5	12.0	15.0
Number of outlets	8 / 16 <sup>1</sup>	10 / 20 <sup>1</sup>	20 / 40 <sup>1</sup>	24 / 48 <sup>1</sup>	30 / 60 <sup>1</sup>	38 / 76 <sup>1</sup>	40 / 80 <sup>1</sup>	50 / 100 <sup>1</sup>
Weight without attachment	220 kg	240 kg	470 kg	570 kg	680 kg	980 kg	1050 kg	1490 kg
Number of hydraulic valves with SA	1x SA <sup>2</sup>	1x SA <sup>2</sup>	1x DA <sup>3</sup>					
Ø nozzle cross-section in mm	47 - 87	47 - 87	47 - 87	47 - 87	47 - 87	47 - 87	47 - 87	47 - 87
Attachment option	Tanker	Tanker	Tanker	Tanker	Tanker	Tanker	Tanker	Tanker
INOX trailing shoe 30 cm	●	●	●	●	●	●	●	●
HARDOX trailing shoe 30 cm	●	●	●	●	●	●	●	●
DUOFIX trailing shoe 15 cm	●	●	●	●	●	●	●	●
Stone collector	-	-	●	●	●	●	●	●
Knuckle on inlet bend	-	-	●	●	●	●	●	●
Lever slide on T-piece	-	-	●	●	●	-	-	-
Compensating linkage joint for side arm	-	-	-	-	-	-	-	●
Guide wheels for side arm	-	-	-	-	-	-	-	●
LED lighting	-	-	●	●	●	●	●	●
Electric safety valve	-	-	●	●	●	●	●	●

<sup>1</sup> for Duofix triangular share option

<sup>2</sup> SA (Single-acting valve)

<sup>3</sup> DA (Double-acting valve)

● series

● optional

## Cost saving with Schleppfix compared to conventional systems



**Swisstec AG**  
 Spezialmaschinenbau  
 Werkstrasse 4  
 CH-9243 Jonschwil  
 +41 (71) 923 23 72  
 info@swisstecag.ch  
 www.swisstecag.ch  
 www.schleppfix.ch

Your dealer:



25-1 EN

