



SCHLEPPFIX

simply better

SLURRY SPREADER TRACTOR ATTACHMENT

no run-off hoses

no rotating distributor head

low wear

significant fuel savings

working widths 7.5 m - 9 m

The innovative, emission-reducing
slurry application system
for future-oriented agriculture



Swiss patent CH716757 | European patent EP3959956

 **SWISSTEC AG**
SPEZIALMASCHINENBAU

Schleppfix SVA for use with hoses

Characteristics

- ✓ Clean and precise depositing in the crop due to shoe system
- ✓ **Tare weight** of the applicator when spreading slurry **on the ground** (low front axle load reduction)
- ✓ Very simple, **solid hydraulic system**: only one double-acting control valve (no floating position) required, **no electric valves**, etc.
- ✓ Low demands on the tractor hydraulics
- ✓ Spread rate individually **adjustable** to **pump capacity** (no twisting of hoses)
- ✓ **Optimal** weight displacement in **transport position**
- ✓ Outriggers with **additional linkage joint** can swivel **320°** to reduce drag when turning

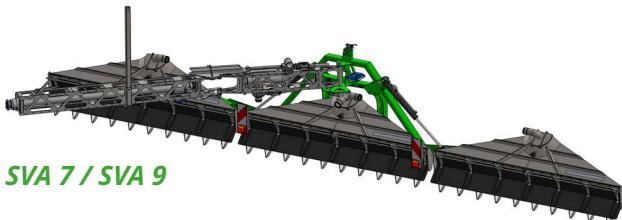

SAVE MONEY WHEN SPREADING SLURRY SIMPLE | EFFICIENT | INEXPENSIVE

100% LESS FUEL CONSUMPTION

68% LESS MAINTENANCE COSTS

72% LESS SPREADING TIME


63% LESS CLEANING TIME

76% INCREASE IN EFFICIENCY
THANKS TO SCHLEPPFIX



Technical details

Schleppfix SVA

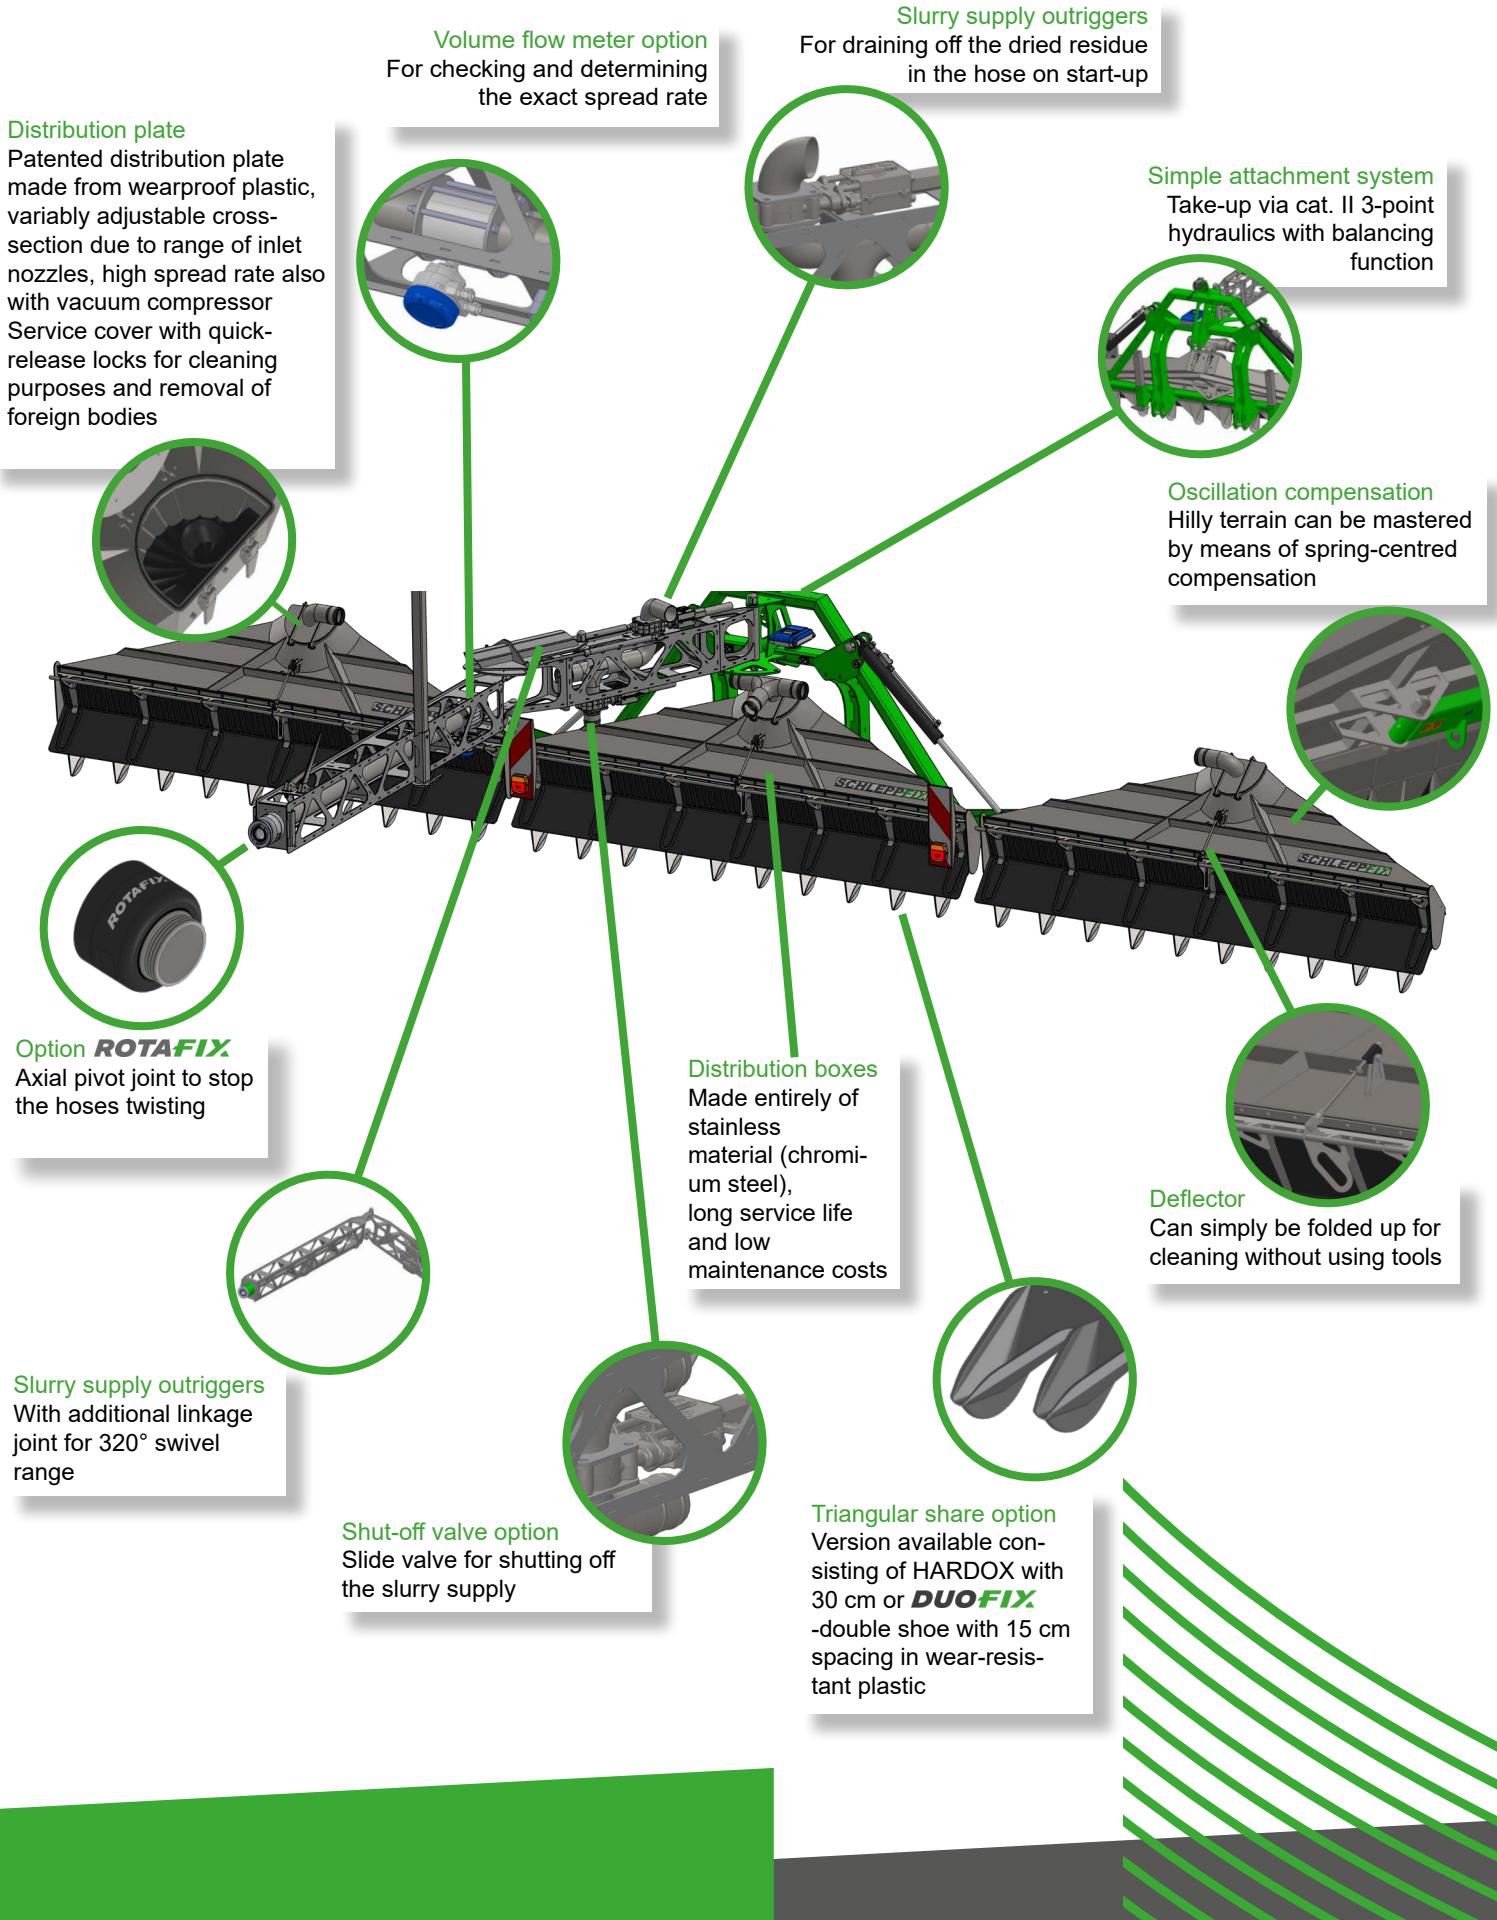

Technical Data

Schleppfix Type	SVA 7	SVA 9
Working width in meters	7.5	9.0
Number of outlets	24 / 48 ¹	30 / 60 ¹
Weight without attachment	690 kg	790 kg
Number of hydraulic valves with SA	1x DW ²	1x DW ²
Ø nozzle cross-section in mm	47 - 87	47 - 87
Attachment option	Tractor	Tractor
INOX trailing shoe 30 cm	●	●
HARDOX trailing shoe 30 cm	●	●
DUOFIX trailing shoe 15 cm	●	●
LED lighting	●	●
Electric safety valve	●	●
Start-up drain valve 1x DA ²	●	●
Supply shut-off valve 1x DA ²	●	●
Axial pivot joint Rotafix	●	●
Flow meter	●	●
Boom brake	●	●

¹for Duofix triangular share option

²DA (Double-acting valve)

● series ● optional


PIVOT JOINT

ROTARY TRANSMISSION EASY | STABLE | CONSISTENT

- AXIAL ROLLER BEARINGS FOR HIGH PULLING FORCES
- SLIDE BEARINGS FOR RADIAL TENSILE FORCES
- BSP THREAD/FLANGE CONNECTION
- LIGHTWEIGHT AND COMPACT DESIGN
- STAINLESS STEEL INNER TUBE
- SIZES 3"/4"/5"




Cost saving with Schleppfix compared to conventional systems

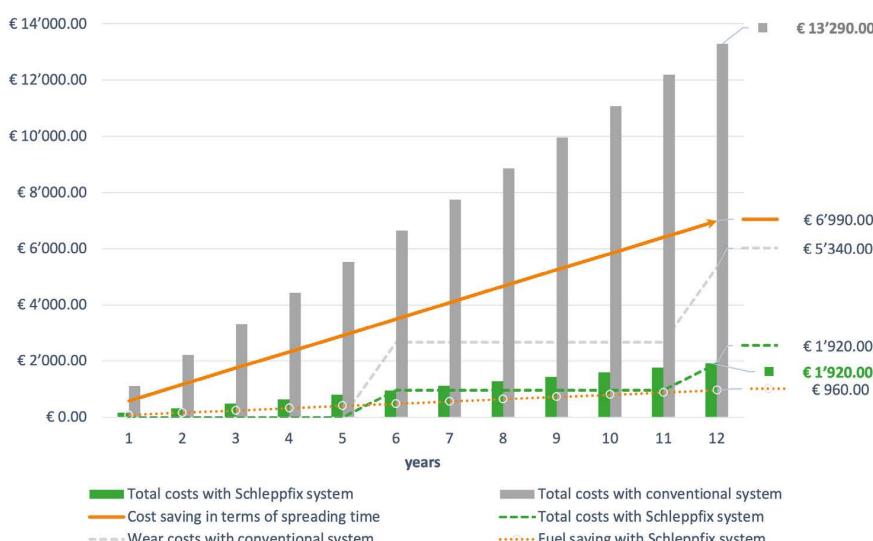

Swisstec AG
Spezialmaschinenbau
Werkstrasse 4
CH-9243 Jonschwil

+41 (71) 923 23 72
info@swisstecag.ch
www.swisstecag.ch
www.schleppfix.ch

Your dealer:

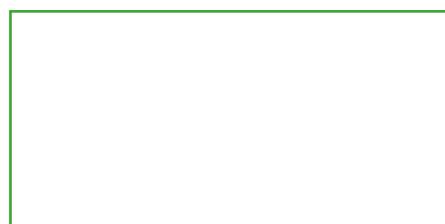

25-1 EN

